


Axial Feeder

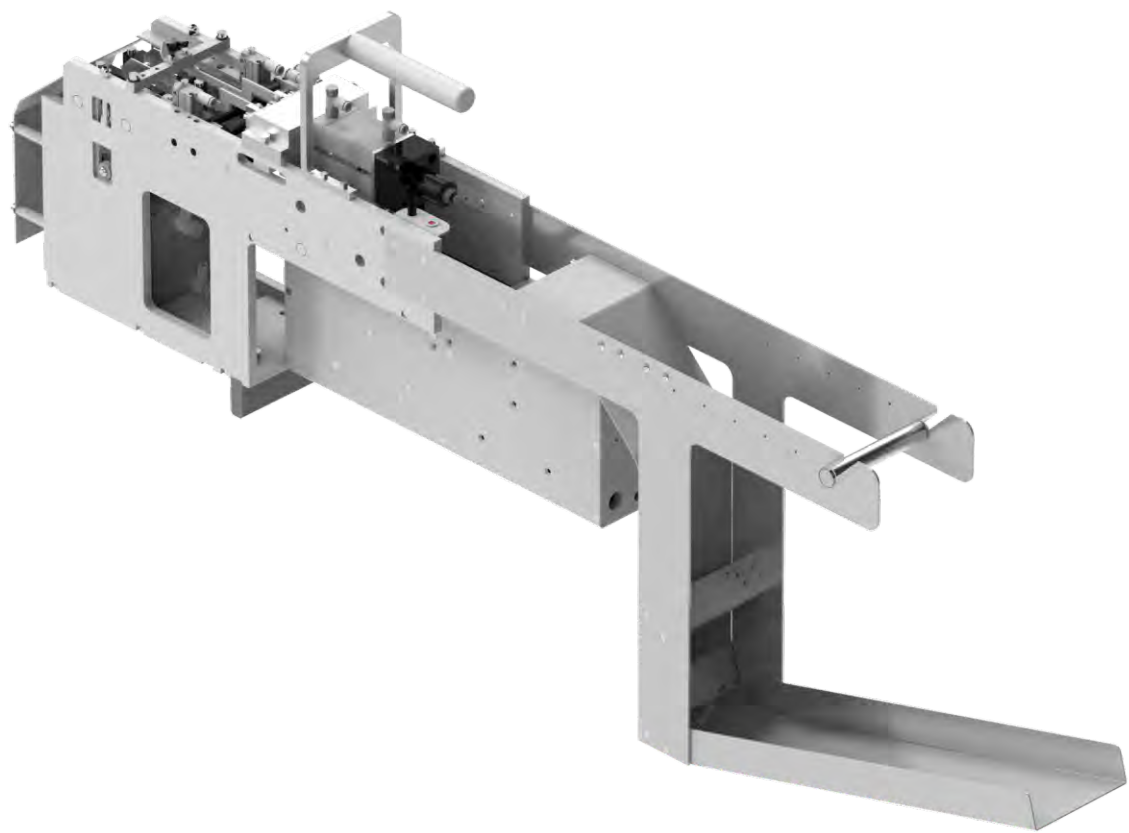

FUNCTION DESCRIPTION

The horizontal component feeder delivers horizontally taped electronic components to the plug-in machine. In order to ensure accuracy and assembly reliability, the component pickup point is set as the center of the electronic components. The horizontal component feeder is equipped with a pre-processing module that adjusts component spacing for accurate insertion into the PCB.

- The distance of the blade at the discharge end is adjustable, the size of the bending part of the component pin is adjustable, and the size of the cutting part is adjustable
- Automatic detection of discharging end materials

Model	Feeder Width	Tape Width	Tape Spacing	Discharge Speed
M7108595 - 05	96mm	≤66mm	5-25mm Adjustable	80pcs/min
M7108596 - 05	116mm	≤86mm	5-25mm Adjustable	80pcs/min
M7108775 - 03	136mm	≤106mm	5-25mm Adjustable	80pcs/min

ADAPTIVE COMPONENT



Horizontal Taping Elements